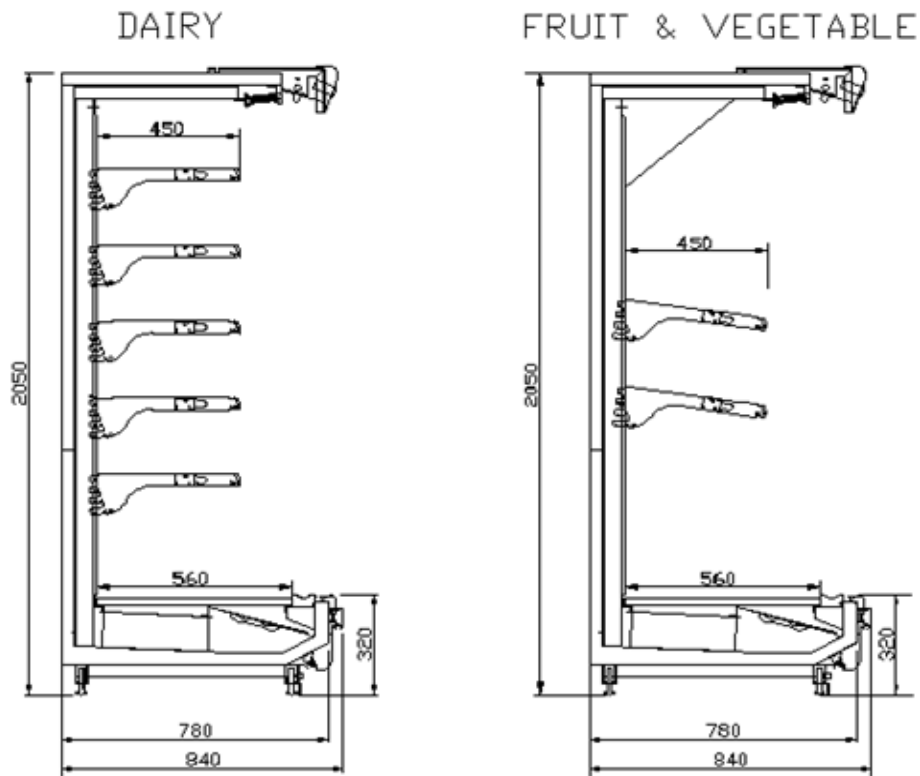


Dimensions:

TYPE (240 V / 50 Hz)	UNIT	1250	1875	2500	3125	3437	3750
LENGTH (without gable ends)	mm	1250	1875	2500	3125	3437	3750
WIDTH	mm	850	850	850	850	850	850
HIGH	mm	2000	2000	2000	2000	2000	2000
GABLE END THICKNESS	mm	50	50	50	50	50	50
NET WEIGHTS	Kg	150	200	300	350	400	450
TEMP. CONTROL		DIXELL XR 20 C / ELIWELL ID 961					
EXPANSION VALVE-SOLENOID VALVE		DANFOSS / ALCO					
EVAPARATOR FANS		EBM / ELCO					
IP CLASS	IP	21	21	21	21	21	21
EVAPORATING TEMPERATURE	°C	-8	-8	-8	-8	-8	-8
CUT OUT TEMPERATURE	°C	2	2	2	2	2	2
CUT IN TEMPERATURE	°C	4	4	4	4	4	4
REFRIGERATION CAPACITY	Kcal/h / Watt	1250 1453	1875 2180	2500 2910	3125 3633	3437 4000	3750 4360
DEFROST DURATION	mins	20	20	20	20	20	20
DEFROSTS PER 24hr PERIOD	No.	8	8	8	8	8	8
REFRIGERANT GAS		R404a	R404a	R404a	R404a	R404a	R404a
LIGHTING	Watt	1 x 36	2 x 30	2 x 36	2x30+1x36	1x30+2x36	3 X 36
FAN	Watt	2 x 40	3 x 40	4 x 40	5 x 40	5 x 40	6 x 40
Cabinet Total Elec.Power (W) / Voltage (V)	Watt / V	120	180	235	300	335	350
POWER SUPPLY		230-1-50	230-1-50	230-1-50	230-1-50	230-1-50	230-1-50
CLIMATIC CLASS	EN 441	CLASS 3 (25 C / 60% RH)					
CABINET CLASS (EN 441-6)	M 2	(-1/+7°C)	(-1/+7°C)	(-1/+7°C)	(-1/+7°C)	(-1/+7°C)	(-1/+7°C)