


Multideck: C

Here's a multideck that offers much more than any of its contemporaries. With an eye-catching high-grade stainless steel version, this open-front display case offers great visibility and capacity. What's more, the SL model allows full multiplexing for even greater capacity and display area.

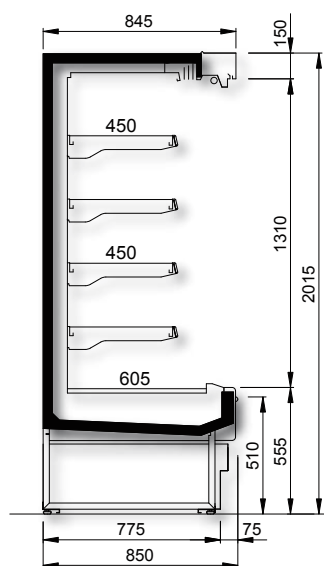

C

DIMENSIONS IN mm

APPLICATIONS:

- C: Dairy, fruit, vegetables, deli, soft drinks, beer, snack foods, etc.
- C1: Meat, poultry

STANDARD EQUIPMENT:

- Manual night blind
- 4-tier adjustable shelving (height and angle)
- 40mm ticket strip
- Electronic TEK controller
- Solid end panel with mirrored interior
- Canopy lighting
- Digital thermometer
- Removable condensing unit for easy cleaning
- Self-evaporating drainage system
- Bumper
- Adjustable feet

OPTIONS AND ACCESSORIES:

- Transparent side panels with optional lighting
- High-grade stainless steel finish
- Side/double lighting kit
- Multiplexing kit
- Ticket strip kit
- Auxiliary evaporator kit
- 35mm Perspex shelf riser
- Fixed Perspex divider
- Mirror kit
- Display rack kit (C19 models only)
- Adaptable to 115V/60Hz
- Wide choice of colours
- Bumpers available in 6 colours
- Adhesive branding
- Canopy branding

MULTIDECK: C

	C-10	C-14	C-19	C-26	C1-10	C1-14	C1-19	C1-26
Merchandising data								
Length (mm)	980	1330	1880	2580	980	1330	1880	2580
Capacity (l)	558	775	1116	1550	558	775	1116	1550
Net volume (m ³)	1.68	2.28	3.22	4.42	1.68	2.28	3.22	4.42
Gross volume (m ³)	2.21	2.93	4.11	5.59	2.21	2.93	4.11	5.59
Refrigerated area (m ²)	2.17	3.01	4.33	6.01	2.17	3.01	4.33	6.01
Total display area (m ²)	1.29	1.80	2.59	3.59	1.29	1.80	2.59	3.59
No. shelves	4	4	4(x2)	4(x2)	4	4	4(x2)	4(x2)
Shelf dimensions (w x l, mm)	450x900	450x1250	450x900	450x1250	450x900	450x1250	450x900	450x1250
Max. load per shelf (kg) (ref. 200kg/m ²)	81	112	81	112	81	112	81	112
Electrical data								
Energy consumption (kWh/24h)	27.5	32.4	38.7	51.4	27	31.9	40.9	52
Maximum amperage (A)	8.2	9.7	11.7	17	8.2	9.9	14.7	17.5
Sound level (dB)	60	60	63	63	61	61	63	63
Refrigeration data								
Climate class	3	3	3	3	3	3	3	3
Product temperature class	M2	M2	M2	M2	M1	M1	M1	M1
Refrigerant gas	404A	404A	404A	404A	404A	404A	404A	404A
Refrigerant quantity (g)	1150	1300	2000	2x1300	1250	1450	2x1250	2x1500
Refrigeration system (static/air cooled)	Air cooled	Air cooled	Air cooled	Air cooled	Air cooled	Air cooled	Air cooled	Air cooled
Automatic defrosting (yes/no)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes



Raising the standard in refrigeration design

