


# Multideck: M

Available in two temperature versions (M and M1), the KOXKA SUPERETTE Multideck M is ideal for the display of refrigerated perishables. With a range of different case lengths and a choice of add-on accessories, this unit offers maximum storage for minimum floor space and one of the lowest energy consumptions on the market.

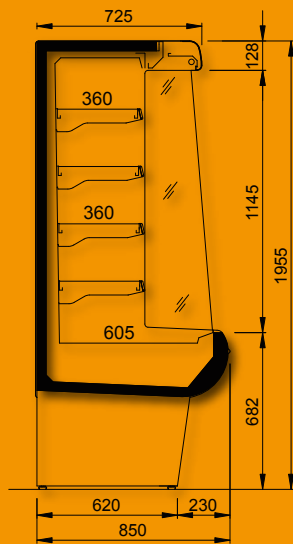

M

DIMENSIONS IN mm

### APPLICATIONS:

- M: Dairy, fruit, vegetables, deli, drinks, etc.
- M1: Meat, poultry

### STANDARD EQUIPMENT:

- Manual night blind
- 4-tier adjustable shelving (height and angle)
- 40mm ticket strip on shelves
- Electromechanical control
- Display end panel for enhanced visibility
- Canopy lighting
- Thermometer
- Removable condensing unit for easy cleaning
- Self-evaporating drainage system
- Bumper
- Adjustable feet

### OPTIONS AND ACCESSORIES:

- Lighting (or double lighting) kit
- Internal mirror
- 35mm Perspex shelf up stand
- Ticket strip kit
- Shelf kit
- Deli bars and hooks
- Castor kit
- Multiplexing kit
- Base deck auxiliary evaporator kit
- Adaptable to 115V/60Hz
- Wide choice of colours
- Bumpers available in 6 colours
- Adhesive branding
- Canopy branding

## MULTIDECK: M

	M-10	M-14	M-19	M-26	M1-10	M1-14	M1-19	M1-26
<b>Merchandising data</b>								
Length (mm)	980	1330	1880	2580	980	1330	1880	2580
Capacity (l)	396	550	792	1100	396	550	792	1100
Net volume (m <sup>3</sup> )	1.63	2.21	3.12	4.29	1.63	2.21	3.12	4.29
Gross volume (m <sup>3</sup> )	1.98	2.62	3.68	5.0	1.98	2.62	3.68	5.00
Refrigerated area (m <sup>2</sup> )	1.84	2.56	3.68	5.11	1.84	2.56	3.68	5.11
Total display area (m <sup>2</sup> )	1.26	1.75	2.52	3.50	1.26	1.75	2.52	3.50
No. shelves	4	4	4(x2)	4(x2)	4	4	4(x2)	4(x2)
Shelf dimensions (w x l, mm)	350x900	350x1250	350x900	350x1250	350x900	350x1250	350x900	350x1250
Max. Load per shelf (kg) (ref. 200kg/m <sup>2</sup> )	64	87	64	87	64	87	64	87
<b>Electrical data</b>								
Energy consumption (kWh/24h)	25.7	32.8	35.7	42.3	24.1	30.24	42.8	48.8
Maximum amperage (A)	7.1	8.1	10.5	12.2	7	9.1	11.3	15.1
Sound level (dB)	58	58	59	63	60	60	62	63
<b>Refrigeration data</b>								
Climate class	3	3	3	3	3	3	3	3
Product temperature class	M2	M2	M2	M2	M1	M1	M1	M1
Refrigerant gas	404A	404A	404A	404A	404A	404A	404A	404A
Refrigerant quantity (g)	900	1150	1800	1750	950	1000	1400	2x1000
Refrigeration system (static/air cooled)	Air cooled	Air cooled	Air cooled	Air cooled	Air cooled	Air cooled	Air cooled	Air cooled
Automatic defrosting (yes/no)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes